


# TYPE FT-1 FLEXITEST SWITCH, SWITCH ARRANGEMENT & INTERNAL SCHEMATIC

REF.  
10 POS SW.  
UPPER SECTION  
FRONT VIEW  
(CVR REMOVED)

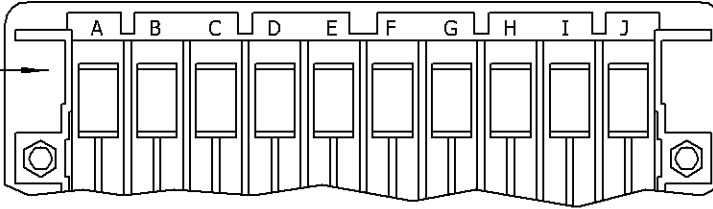


POLE POSITIONS

SWITCH ARRANGEMENT

INTERNAL SCHEMATIC

TERMINAL NO.s  
(REAR OF SW)

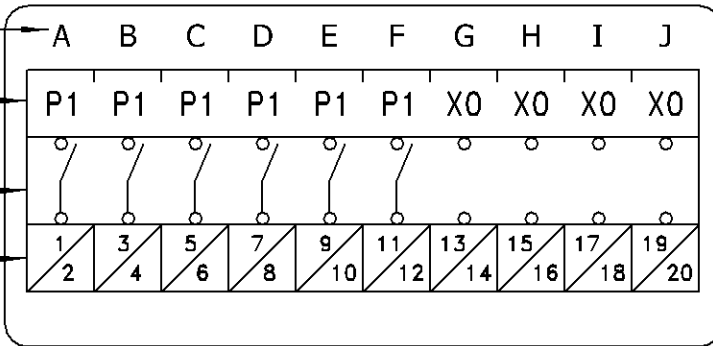

ARRANGEMENT: P P P P P P X X X X

**STYLE No:** 291B958G25

**CODE No:** 216

**CLASS 1E:** NO

No. POLES: 6

No. POTENTIALS: 6

No. CURRENTS: 0

TIE BARS: NONE

DRILL PLAN: 129A500

INT SCHEMATIC: 991A216

Table 1 - Description of Poles for FT Flexitest Switches

Pole Type	Pole Designation	Handle Color	Description & Schematic Symbol	
Potential	P1	P	Black <sup>†</sup> Potential, non-shorting blade.	
Current	C1	C	Black <sup>†</sup> Current, non-shorting, with test jack and blade.	
Current †† Shorting	C1-C1	C-C	Black <sup>†</sup>	
	C1-A1	C-A		Current shorting (make-before-break), with test jack and blade.
	C1-B0	C-B		Current shorting (make-before-break), with blade only.
	C1-D0	C-D		Current shorting (make-before-break), with stud only.
	C1-E1	C-E		Current shorting (make-before-break), with test jack only.
	C1-S0	C-S		Current shorting (make-before-break), with shorting blade only.
Other	D0	D	None Current test jack, no blade.	
	S0	S	None Fixed shorting strap.	
	X0	X	None Empty pole position.	

† = See Table 2 for complete list of color handles.  
 †† = Current shorting poles can span up to 5 positions, and can have any combination of color handles (ex: C1-C7-C5-C2-A4).

Table 2 – Handle Colors

Pole Type	Pole Designation	Handle Color
Potential	P1	P
	P2	T
	P3	H
	P4	V
	P5	G
	P6	Y
	P7	Z
	P8	W
	P9	O
Current	C1	C
	C2	R
	C3	3
	C4	4
	C5	5
	C6	6
	C7	7
	C8	8
	C9	9

**TEST PLUGS:**

**INDIVIDUAL CURRENT CIRCUIT TEST PLUG.**  
 STYLE No: 7B4618G04

**SEPARATE SOURCE TEST PLUG (10 POS).**  
 STYLE No: 1164046

**IN-SERVICE SERIES TEST PLUG.**  
 STYLE No: 129A062G10

ECO EM2007-1099 1

The information contained in this document has to be kept strictly confidential. Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden.  
 ABB reserves all rights regarding Intellectual Property Rights.

SOFTWARE TYPE:  
 AUTOCAD 2006

ENG. REF: MFG DWG: 101R271  
 GEN DWG: 1616C24

DFTRIDATE: M.Uriguen 4/3/2008  
 CHKRIDATE: M.Uriguen 4/3/2008  
 APPRIDATE: Tim Masters 4/3/2008



TITLE:  
**FT-1 SWITCH  
 POLE ARRANGEMENT & INT SCH**

© Copyright 2008 ABB  
 All rights reserved

SIZE: **A** DWG. NO: **991A216** REV: **1**

ABB Protective Relays and Switches, Coral Springs FL, U.S.A.

SCALE: **NONE** SHEET 1 OF 1