

# TYPE FT-1 FLEXITEST SWITCH, SWITCH ARRANGEMENT & INTERNAL SCHEMATIC

REF.  
10 POS SW.  
UPPER SECTION  
FRONT VIEW  
(CVR REMOVED)




**STYLE No:** 991AB20G01  
**CODE No:** B20  
**CLASS 1E:** NO

POLE  
POSITIONS

SWITCH  
ARRANGEMENT

INTERNAL  
SCHEMATIC

TERMINAL NO.s  
(REAR OF SW)

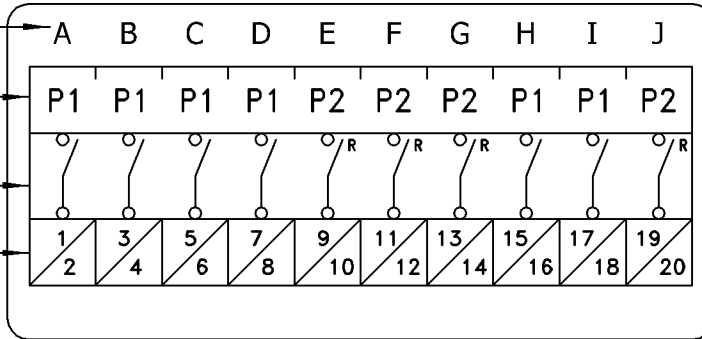

No. POLES: 10  
No. POTENTIALS: 10  
No. CURRENTS: 0  
TIE BARS: NONE  
DRILL PLAN: 129A500  
INT SCHEMATIC: 991AB20

**ARRANGEMENT: P P P P T T T P P T**

Table 1 - Description of Poles for FT Flexitest Switches

Pole Type	Pole Designation	Handle Color	Description & Schematic Symbol	
Potential	P1	P	Black <sup>†</sup> Potential, non-shorting blade.	
Current	C1	C	Black <sup>†</sup> Current, non-shorting, with test jack and blade.	
Current †† Shorting	C1-C1	C-C	Black <sup>†</sup> Current shorting (make-before-break), with test jack and blade.	
	C1-A1	C-A		Current shorting (make-before-break), with blade only.
	C1-B0	C-B		Current shorting (make-before-break), with stud only.
	C1-D0	C-D		Current shorting (make-before-break), with test jack only.
	C1-E1	C-E		Current shorting (make-before-break), with shorting blade only.
	C1-S0	C-S		Current shorting (make-before-break), with fixed shorting strap.
Other	D0	D	None Current test jack, no blade.	
	S0	S	None Fixed shorting strap.	
	X0	X	None Empty pole position.	

† = See Table 2 for complete list of color handles.

†† = Current shorting poles can span up to 5 positions, and can have any combination of color handles (ex: C1-C7-C5-C2-A4).

Table 2 – Handle Colors

Pole Type	Pole Designation	Handle Color
Potential	P1	P
	P2	T
	P3	H
	P4	V
	P5	G
	P6	Y
	P7	Z
	P8	W
	P9	O
Current	C1	C
	C2	R
	C3	3
	C4	4
	C5	5
	C6	6
	C7	7
	C8	8
	C9	9

**TEST PLUGS:**

**INDIVIDUAL CURRENT CIRCUIT TEST PLUG.**  
STYLE No: 7B4618G04

**SEPARATE SOURCE TEST PLUG (10 POS).**  
STYLE No: 1164046

**IN-SERVICE SERIES TEST PLUG.**  
STYLE No: 129A062G10

1 ECO EM2008-1197	The information contained in this document has to be kept strictly confidential. Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden. ABB reserves all rights regarding Intellectual Property Rights.	DTR/DATE: R.Novoseletsky 12/4/2008			
		CHKR/DATE: M.Uriguen 12/4/2008			
		APPR/DATE: Tim Masters 12/4/2008			
	SOFTWARE TYPE: AUTOCAD 2006	TITLE: <b>FT-1 SWITCH POLE ARRANGEMENT &amp; INT SCH</b>			
	ENG. REF: MFG DWG: FT1-B20 GEN DWG: 1616C24	© Copyright 2008 ABB All rights reserved	SIZE: <b>A</b>	DWG. NO: <b>991AB20</b>	REV: <b>1</b>
ABB Protective Relays and Switches, Coral Springs Fl, U.S.A.		SCALE: NONE	SHEET 1 OF 1		