

# TYPE FT-1 FLEXITEST SWITCH, SWITCH ARRANGEMENT & INTERNAL SCHEMATIC

REF.  
10 POS SW.  
UPPER SECTION  
FRONT VIEW  
(CVR REMOVED)




POLE  
POSITIONS

SWITCH  
ARRANGEMENT

INTERNAL  
SCHEMATIC

TERMINAL NO.s  
(REAR OF SW)

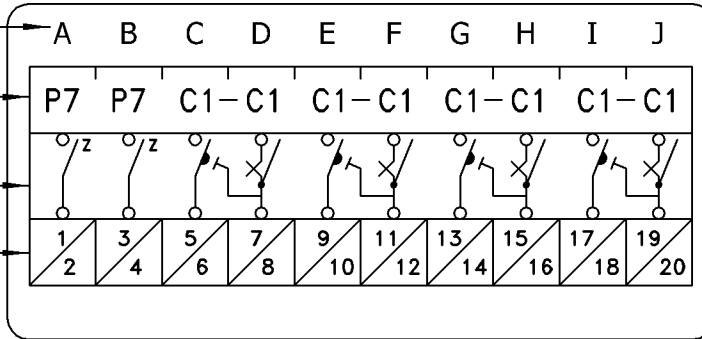

ARRANGEMENT: Z Z C-C C-C C-C C-C

**STYLE No:** 991AC24G01

**CODE No:** C24

**CLASS 1E:** NO

No. POLES: 10

No. POTENTIALS: 2

No. CURRENTS: 8

TIE BARS: NONE

DRILL PLAN: 129A500

INT SCHEMATIC: 991AC24

Table 1 - Description of Poles for FT Flexitest Switches

Pole Type	Pole Designation		Handle Color	Description & Schematic Symbol
Potential	P1	P	Black <sup>†</sup>	Potential, non-shorting blade.
Current	C1	C	Black <sup>†</sup>	Current, non-shorting, with test jack and blade.
Current †† Shorting	C1-C1	C-C	Black <sup>†</sup>	Current shorting (make-before-break), with test jack and blade.
	C1-A1	C-A		Current shorting (make-before-break), with blade only.
	C1-B0	C-B		Current shorting (make-before-break), with stud only.
	C1-D0	C-D		Current shorting (make-before-break), with test jack only.
	C1-E1	C-E		Current shorting (make-before-break), with shorting blade only.
	C1-S0	C-S		Current shorting (make-before-break), with fixed shorting strap.
Other	D0	D	None	Current test jack, no blade.
	S0	S	None	Fixed shorting strap.
	X0	X	None	Empty pole position.

† = See Table 2 for complete list of color handles.

†† = Current shorting poles can span up to 5 positions, and can have any combination of color handles (ex: C1-C7-C5-C2-A4).

Table 2 – Handle Colors

Pole Type	Pole Designation		Handle Color
Potential	P1	P	Black
	P2	T	Red
	P3	H	Brown
	P4	V	Purple
	P5	G	Green
	P6	Y	Yellow
	P7	Z	Blue
	P8	W	White
	P9	O	Orange
Current	C1	C	Black
	C2	R	Red
	C3	3	Brown
	C4	4	Purple
	C5	5	Green
	C6	6	Yellow
	C7	7	Blue
	C8	8	White
	C9	9	Orange

**TEST PLUGS:**

INDIVIDUAL CURRENT CIRCUIT TEST PLUG.  
STYLE No: 7B4618G04

SEPARATE SOURCE TEST PLUG (10 POS).  
STYLE No: 1164046

IN-SERVICE SERIES TEST PLUG.  
STYLE No: NONE

1 ECO EM2009-1272	The information contained in this document has to be kept strictly confidential. Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden. ABB reserves all rights regarding Intellectual Property Rights.	DTR/DATE: R.Novoseletsky 6/17/2009		
		CHKR/DATE: M.Uriguen 6/17/2009		
		APPR/DATE: Tim Masters 6/17/2009		
		SOFTWARE TYPE: AUTOCAD 2006	TITLE: <b>FT-1 SWITCH POLE ARRANGEMENT &amp; INT SCH</b>	
		ENG. REF: MFG DWG: FT1-C24 GEN DWG: 1616C24	© Copyright 2008 ABB All rights reserved	SIZE: <b>A</b>
ABB Protective Relays and Switches, Coral Springs Fl, U.S.A.			SCALE: NONE	REV: <b>1</b> SHEET 1 OF 1