


TYPE FT-14 FLEXITEST SWITCH, SWITCH ARRANGEMENT & INTERNAL SCHEMATIC

REF.
14 POS SW.
UPPER SECTION
FRONT VIEW
(CVR REMOVED)

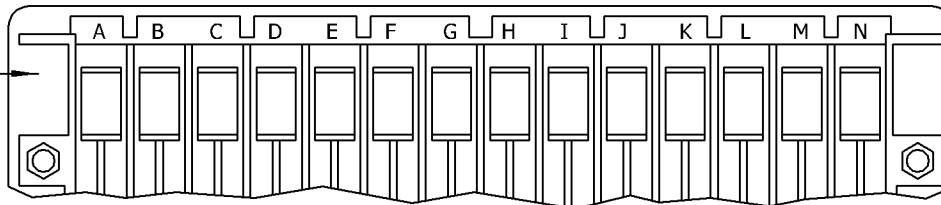

STYLE No:
FT4A13T07CN4161

CODE No: 4161


CLASS 1E: NO

POLE
POSITIONS

SWITCH
ARRANGEMENT

INTERNAL
SCHEMATIC

TERMINAL NO.s
(REAR OF SW)

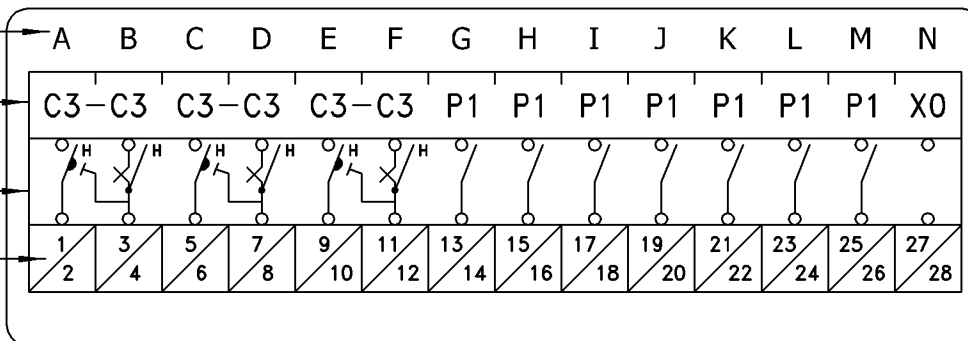

No. POLES: 13

No. POTEN's: 7

No. CURR's: 6

TIE BARS: NONE

DRILL PLAN: 9666A30

INT SCH: 94A4161

ARRANGEMENT: 3-3 3-3 3-3 P P P P P P P X

Table 1 - Description of Poles for FT Flexitest Switches

Pole Type	Pole Designation	Handle Color	Description & Schematic Symbol	
Potential	P1	P	Black [†] Potential, non-shorting blade.	
Current	C1	C	Black [†] Current, non-shorting, with test jack and blade.	
Current ^{††} Shorting	C1-C1	C-C	Black [†] Current shorting (make-before-break), with test jack and blade.	
	C1-A1	C-A		Current shorting (make-before-break), with blade only.
	C1-B0	C-B		Current shorting (make-before-break), with stud only.
	C1-D0	C-D		Current shorting (make-before-break), with test jack only.
	C1-E1	C-E		Current shorting (make-before-break), with shorting blade only.
	C1-S0	C-S		Current shorting (make-before-break), with fixed shorting strap.
Other	D0	D	None Current test jack, no blade.	
	S0	S	None Fixed shorting strap.	
	X0	X	None Empty pole position.	

Table 2 - Handle Colors

Pole Type	Pole Designation	Handle Color	
Potential	P1	P	Black
	P2	T	Red
	P3	H	Brown
	P4	V	Purple
	P5	G	Green
	P6	Y	Yellow
	P7	Z	Blue
	P8	W	White
	P9	O	Orange
Current	C1	C	Black
	C2	R	Red
	C3	3	Brown
	C4	4	Purple
	C5	5	Green
	C6	6	Yellow
	C7	7	Blue
	C8	8	White
	C9	9	Orange

TEST PLUGS:

INDIVIDUAL CURRENT CIRCUIT TEST PLUG.
STYLE No: 7B4618G04

SEPARATE SOURCE TEST PLUG (14 POS).
STYLE No: 1355D32G04

IN-SERVICE SERIES TEST PLUG.
STYLE No: NONE

† = See Table 2 for complete list of color handles.

†† = Current shorting poles can span up to 5 positions, and can have any combination of color handles (ex: C1-C7-C5-C2-A4).

1
ECO EM2008-1211

The information contained in this document has to be kept strictly confidential. Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden.
ABB reserves all rights regarding Intellectual Property Rights.

SOFTWARE TYPE:
AUTOCAD 2006

ENG. REF: MFG DWG: FT14-4161
GEN DWG: 1619C94

ABB Protective Relays and Switches, Coral Springs Fl, U.S.A.

DFT/DATE: R.Novoseletsky 1/14/2009

CHKR/DATE: M.Uriguen 1/14/2009

APPR/DATE: Tim Masters 1/14/2009

TITLE:
**FT-14 SWITCH
POLE ARRANGEMENT & INT SCH**

© Copyright 2008 ABB
All rights reserved

SIZE
A

DWG. NO:
94A4161

REV:
1

SCALE: NONE SHEET 1 OF 1

