

# TYPE FT-14 FLEXITEST SWITCH, SWITCH ARRANGEMENT & INTERNAL SCHEMATIC

REF.  
14 POS SW.  
UPPER SECTION  
FRONT VIEW  
(CVR REMOVED)




**STYLE No:**  
**FT4A14T14CN4073**

**CODE No:** 4073

**CLASS 1E:** NO

POLE  
POSITIONS  
SWITCH  
ARRANGEMENT  
INTERNAL  
SCHEMATIC  
TERMINAL NO.s  
(REAR OF SW)

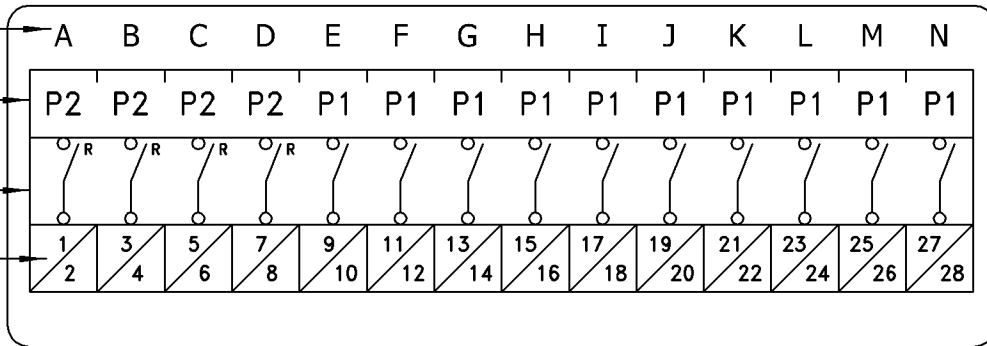

No. POLES: 14

No. POTEN's: 14

No. CURR's: 0

TIE BARS: NONE

DRILL PLAN: 9666A30

INT SCH: 94A4073

**ARRANGEMENT: T T T T P P P P P P P P P P**

Table 1 - Description of Poles for FT Flexitest Switches

Pole Type	Pole Designation	Handle Color	Description & Schematic Symbol	
Potential	P1	P	Black <sup>†</sup> Potential, non-shorting blade.	
Current	C1	C	Black <sup>†</sup> Current, non-shorting, with test jack and blade.	
Current †† Shorting	C1-C1	C-C	Black <sup>†</sup> Current shorting (make-before-break), with test jack and blade.	
	C1-A1	C-A		Current shorting (make-before-break), with blade only.
	C1-B0	C-B		Current shorting (make-before-break), with stud only.
	C1-D0	C-D		Current shorting (make-before-break), with test jack only.
	C1-E1	C-E		Current shorting (make-before-break), with shorting blade only.
	C1-S0	C-S		Current shorting (make-before-break), with fixed shorting strap.
Other	D0	D	None Current test jack, no blade.	
	S0	S	None Fixed shorting strap.	
	X0	X	None Empty pole position.	

Table 2 - Handle Colors

Pole Type	Pole Designation	Handle Color
Potential	P1	P
	P2	T
	P3	H
	P4	V
	P5	G
	P6	Y
	P7	Z
	P8	W
	P9	O
Current	C1	C
	C2	R
	C3	3
	C4	4
	C5	5
	C6	6
	C7	7
	C8	8
	C9	9

**TEST PLUGS:**

**INDIVIDUAL CURRENT CIRCUIT TEST PLUG.**  
STYLE No: 7B4618G04

**SEPARATE SOURCE TEST PLUG (14 POS).**  
STYLE No: 1355D32G04

**IN-SERVICE SERIES TEST PLUG.**  
STYLE No: NONE

† = See Table 2 for complete list of color handles.  
†† = Current shorting poles can span up to 5 positions, and can have any combination of color handles (ex: C1-C7-C5-C2-A4).

2 ECO EM2007-1099	The information contained in this document has to be kept strictly confidential. Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden. ABB reserves all rights regarding Intellectual Property Rights.	DFT/DATE: M.Uriguen 4/3/2008	<b>ABB</b>	<b>FT-14 SWITCH POLE ARRANGEMENT &amp; INT SCH</b>		
	SOFTWARE TYPE: AUTOCAD 2006	CHKR/DATE: M.Uriguen 4/3/2008				
	ENG. REF: MFG DWG: FT14-4073 GEN DWG: 1619C94	APPR/DATE: Tim Masters 4/3/2008				
	© Copyright 2008 ABB All rights reserved		TITLE: FT-14 SWITCH POLE ARRANGEMENT & INT SCH	SIZE: <b>A</b>	DWG. NO: <b>94A4073</b>	REV: <b>2</b>
	ABB Protective Relays and Switches, Coral Springs FL, U.S.A.		SCALE: NONE	SHEET 1 OF 1		