

TYPE FT-14 FLEXITEST SWITCH, SWITCH ARRANGEMENT & INTERNAL SCHEMATIC

REF.
14 POS SW.
UPPER SECTION
FRONT VIEW
(CVR REMOVED)




STYLE No:
FT4A13T00CN4088

CODE No: 4088

CLASS 1E: NO

POLE
POSITIONS
SWITCH
ARRANGEMENT
INTERNAL
SCHEMATIC
TERMINAL NO.s
(REAR OF SW)

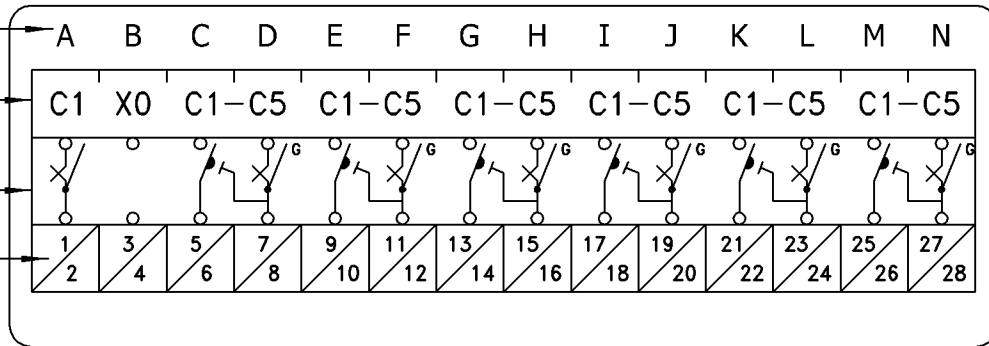

No. POLES: 13

No. POTEN's: 0

No. CURR's: 13

TIE BARS: NONE

DRILL PLAN: 9666A30

INT SCH: 94A4088

ARRANGEMENT: C X C-5 C-5 C-5 C-5 C-5 C-5

Table 1 - Description of Poles for FT Flexitest Switches

Pole Type	Pole Designation	Handle Color	Description & Schematic Symbol	
Potential	P1	P	Black [†] Potential, non-shorting blade.	
Current	C1	C	Black [†] Current, non-shorting, with test jack and blade.	
Current †† Shorting	C1-C1	C-C	Black [†] Current shorting (make-before-break), with test jack and blade.	
	C1-A1	C-A		Current shorting (make-before-break), with blade only.
	C1-B0	C-B		Current shorting (make-before-break), with stud only.
	C1-D0	C-D		Current shorting (make-before-break), with test jack only.
	C1-E1	C-E		Current shorting (make-before-break), with shorting blade only.
	C1-S0	C-S		Current shorting (make-before-break), with fixed shorting strap.
Other	D0	D	None Current test jack, no blade.	
	S0	S	None Fixed shorting strap.	
	X0	X	None Empty pole position.	

Table 2 - Handle Colors

Pole Type	Pole Designation	Handle Color
Potential	P1	P
	P2	T
	P3	H
	P4	V
	P5	G
	P6	Y
	P7	Z
	P8	W
	P9	O
Current	C1	C
	C2	R
	C3	3
	C4	4
	C5	5
	C6	6
	C7	7
	C8	8
	C9	9

TEST PLUGS:

INDIVIDUAL CURRENT CIRCUIT TEST PLUG.
STYLE No: 7B4618G04

SEPARATE SOURCE TEST PLUG (14 POS).
STYLE No: 1355D32G04

IN-SERVICE SERIES TEST PLUG.
STYLE No: NONE

† = See Table 2 for complete list of color handles.

†† = Current shorting poles can span up to 5 positions, and can have any combination of color handles (ex: C1-C7-C5-C2-A4).

ECO EM2007-1099 2

The information contained in this document has to be kept strictly confidential. Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden.
ABB reserves all rights regarding Intellectual Property Rights.

DFTRDATE: M.Uriguen 4/3/2008
CHKRDATE: M.Uriguen 4/3/2008
APPRDATE: Tim Masters 4/3/2008



SOFTWARE TYPE:
AUTOCAD 2006

TITLE:
**FT-14 SWITCH
POLE ARRANGEMENT & INT SCH**

ENG. REF: MFG DWG: FT14-4088
GEN DWG: 1619C94

© Copyright 2008 ABB
All rights reserved

SIZE: **A** DWG. NO: **94A4088** REV: **2**

ABB Protective Relays and Switches, Coral Springs FL, U.S.A.

SCALE: NONE SHEET 1 OF 1