


TYPE FT-14 FLEXITEST SWITCH, SWITCH ARRANGEMENT & INTERNAL SCHEMATIC

REF.
14 POS SW.
UPPER SECTION
FRONT VIEW
(CVR REMOVED)

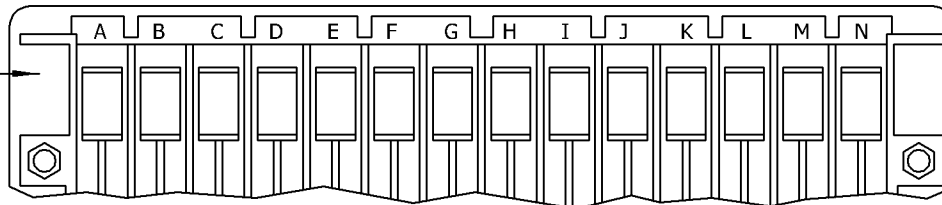


STYLE No:
FT4A11T03CN4183

CODE No: 4183

CLASS 1E: NO

POLE
POSITIONS
SWITCH
ARRANGEMENT
INTERNAL
SCHEMATIC
TERMINAL NO.s
(REAR OF SW)

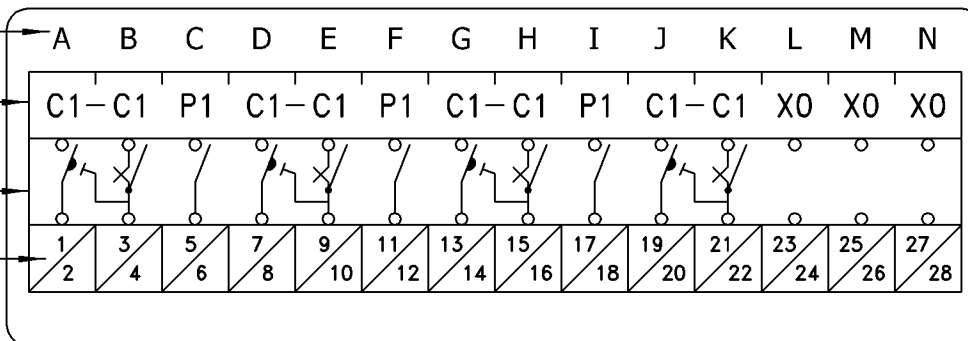

No. POLES: 11

No. POTEN's: 3

No. CURR's: 8

TIE BARS: NONE

DRILL PLAN: 9666A30

INT SCH: 94A4183

ARRANGEMENT: C-C P C-C P C-C P C-C X X X

Table 1 - Description of Poles for FT Flexitest Switches

Pole Type	Pole Designation	Handle Color	Description & Schematic Symbol
Potential	P1	P	Black [†] Potential, non-shorting blade.
Current	C1	C	Black [†] Current, non-shorting, with test jack and blade.
Current ^{††} Shorting	C1-C1	C-C	Black [†] Current shorting (make-before-break), with test jack and blade.
	C1-A1	C-A	Black [†] Current shorting (make-before-break), with blade only.
	C1-B0	C-B	Black [†] Current shorting (make-before-break), with stud only.
	C1-D0	C-D	Black [†] Current shorting (make-before-break), with test jack only.
	C1-E1	C-E	Black [†] Current shorting (make-before-break), with shorting blade only.
	C1-S0	C-S	Black [†] Current shorting (make-before-break), with fixed shorting strap.
Other	D0	D	None Current test jack, no blade.
	S0	S	None Fixed shorting strap.
	X0	X	None Empty pole position.

Table 2 - Handle Colors

Pole Type	Pole Designation	Handle Color	
Potential	P1	P	Black
	P2	T	Red
	P3	H	Brown
	P4	V	Purple
	P5	G	Green
	P6	Y	Yellow
	P7	Z	Blue
	P8	W	White
	P9	O	Orange
Current	C1	C	Black
	C2	R	Red
	C3	3	Brown
	C4	4	Purple
	C5	5	Green
	C6	6	Yellow
	C7	7	Blue
	C8	8	White
	C9	9	Orange

TEST PLUGS:

INDIVIDUAL CURRENT CIRCUIT TEST PLUG.
STYLE No: 7B4618G04

SEPARATE SOURCE TEST PLUG (14 POS).
STYLE No: 1355D32G04

IN-SERVICE SERIES TEST PLUG.
STYLE No: NONE

† = See Table 2 for complete list of color handles.
†† = Current shorting poles can span up to 5 positions, and can have any combination of color handles (ex: C1-C7-C5-C2-A4).

1 ECO EM2009-1254	The information contained in this document has to be kept strictly confidential. Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden. ABB reserves all rights regarding Intellectual Property Rights.	DFT/DATE: R.Novoseletsky 6/29/2009			
		CHKR/DATE: M.Uriguen 6/29/2009			
		APPR/DATE: Tim Masters 6/29/2009			
		SOFTWARE TYPE: AUTOCAD 2006	TITLE: FT-14 SWITCH POLE ARRANGEMENT & INT SCH		
	ENG. REF: MFG DWG: FT14-4183 GEN DWG: 1619C94	© Copyright 2008 ABB All rights reserved	SIZE: A	DWG. NO: 94A4183	REV: 1
ABB Protective Relays and Switches, Coral Springs Fl, U.S.A.			SCALE: NONE	SHEET 1 OF 1	