


TYPE FT-1 FLEXITEST SWITCH, SWITCH ARRANGEMENT & INTERNAL SCHEMATIC

REF.
10 POS SW.
UPPER SECTION
FRONT VIEW
(CVR REMOVED)

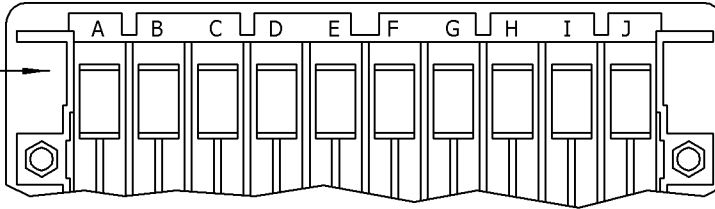


POLE
POSITIONS

SWITCH
ARRANGEMENT

INTERNAL
SCHEMATIC

TERMINAL NO.s
(REAR OF SW)

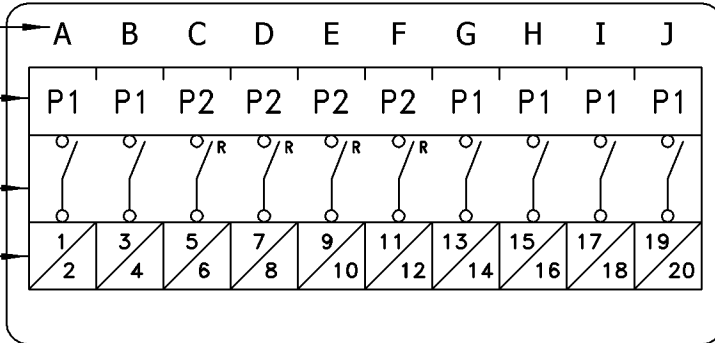

ARRANGEMENT: P P T T T T P P P P

STYLE No: 991A224G01

CODE No: 224

CLASS 1E: NO

No. POLES: 10

No. POTENTIALS: 10

No. CURRENTS: 0

TIE BARS: NONE

DRILL PLAN: 129A500

INT SCHEMATIC: 991A224

Table 1 - Description of Poles for FT Flexitest Switches

| Pole Type | Pole Designation | | Handle Color | Description & Schematic Symbol |
|------------------------|------------------|-----|--------------------|--|
| Potential | P1 | P | Black [†] | Potential, non-shorting blade. |
| Current | C1 | C | Black [†] | Current, non-shorting, with test jack and blade. |
| Current †† Shorting | C1-C1 | C-C | Black [†] | Current shorting (make-before-break), with test jack and blade. |
| | C1-A1 | C-A | | Current shorting (make-before-break), with blade only. |
| | C1-B0 | C-B | | Current shorting (make-before-break), with stud only. |
| | C1-D0 | C-D | | Current shorting (make-before-break), with test jack only. |
| | C1-E1 | C-E | | Current shorting (make-before-break), with shorting blade only. |
| | C1-S0 | C-S | | Current shorting (make-before-break), with fixed shorting strap. |
| Other | D0 | D | None | Current test jack, no blade. |
| | S0 | S | None | Fixed shorting strap. |
| | X0 | X | None | Empty pole position. |

Table 2 – Handle Colors

| Pole Type | Pole Designation | | Handle Color |
|-----------|------------------|---|--------------|
| Potential | P1 | P | Black |
| | P2 | T | Red |
| | P3 | H | Brown |
| | P4 | V | Purple |
| | P5 | G | Green |
| | P6 | Y | Yellow |
| | P7 | Z | Blue |
| | P8 | W | White |
| | P9 | O | Orange |
| Current | C1 | C | Black |
| | C2 | R | Red |
| | C3 | 3 | Brown |
| | C4 | 4 | Purple |
| | C5 | 5 | Green |
| | C6 | 6 | Yellow |
| | C7 | 7 | Blue |
| | C8 | 8 | White |
| | C9 | 9 | Orange |

TEST PLUGS:

**INDIVIDUAL CURRENT CIRCUIT TEST PLUG.
STYLE No: 7B4618G04**

**SEPARATE SOURCE TEST PLUG (10 POS).
STYLE No: 1164046**

**IN-SERVICE SERIES TEST PLUG.
STYLE No: 129A062G10**

† = See Table 2 for complete list of color handles.
†† = Current shorting poles can span up to 5 positions, and can have any combination of color handles (ex: C1-C7-C5-C2-A4).

ECO EM2007-1051 1

The information contained in this document has to be kept strictly confidential. Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden.
ABB reserves all rights regarding Intellectual Property Rights.

SOFTWARE TYPE:
AUTOCAD 2006

ENG. REF: MFG DWG: FT1-224
GEN DWG: 1616C24

DTR/DATE: R.Novoseletsky 1/9/2008
CHKR/DATE: M.Uriguen 1/9/2008
APPR/DATE: Tim Masters 1/9/2008



TITLE:
**FT-1 SWITCH
POLE ARRANGEMENT & INT SCH**

© Copyright 2007 ABB
All rights reserved

SIZE: **A** DWG. NO: **991A224** REV: **1**

ABB Protective Relays and Switches, Coral Springs Fl, U.S.A.

SCALE: **NONE** SHEET 1 OF 1