


TYPE FT-1 FLEXITEST SWITCH, SWITCH ARRANGEMENT & INTERNAL SCHEMATIC

REF.
10 POS SW.
UPPER SECTION
FRONT VIEW
(CVR REMOVED)

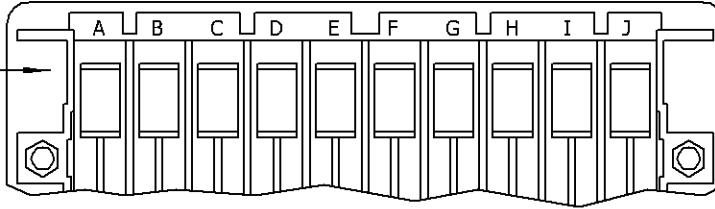


POLE
POSITIONS

SWITCH
ARRANGEMENT

INTERNAL
SCHEMATIC

TERMINAL NO.s
(REAR OF SW)

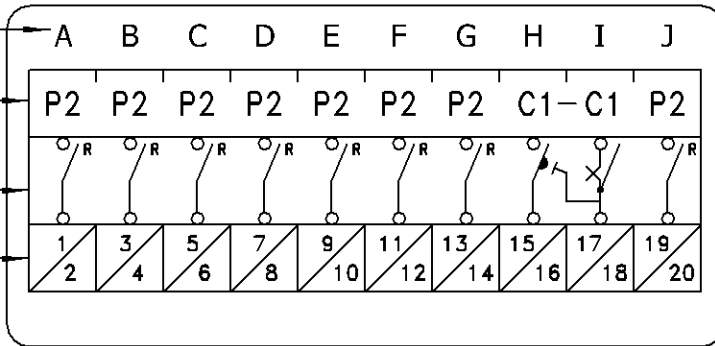

ARRANGEMENT: T T T T T T T C-C T

STYLE No: 1586C42G47

CODE No: 264

CLASS 1E: NO

No. POLES: 10

No. POTENTIALS: 8

No. CURRENTS: 2

TIE BARS: NONE

DRILL PLAN: 129A500

INT SCHEMATIC: 991A264

Table 1 - Description of Poles for FT Flexitest Switches

| Pole Type | Pole Designation | Handle Color | Description & Schematic Symbol |
|------------------------|------------------|--------------|--|
| Potential | P1 | P | Black [†] Potential, non-shorting blade. |
| Current | C1 | C | Black [†] Current, non-shorting, with test jack and blade. |
| Current †† Shorting | C1-C1 | C-C | Black [†] Current shorting (make-before-break), with test jack and blade. |
| | C1-A1 | C-A | Black [†] Current shorting (make-before-break), with blade only. |
| | C1-B0 | C-B | Black [†] Current shorting (make-before-break), with stud only. |
| | C1-D0 | C-D | Black [†] Current shorting (make-before-break), with test jack only. |
| | C1-E1 | C-E | Black [†] Current shorting (make-before-break), with shorting blade only. |
| | C1-S0 | C-S | Black [†] Current shorting (make-before-break), with fixed shorting strap. |
| Other | D0 | D | None Current test jack, no blade. |
| | S0 | S | None Fixed shorting strap. |
| | X0 | X | None Empty pole position. |

Table 2 – Handle Colors

| Pole Type | Pole Designation | Handle Color | |
|-----------|------------------|--------------|--------|
| Potential | P1 | P | Black |
| | P2 | T | Red |
| | P3 | H | Brown |
| | P4 | V | Purple |
| | P5 | G | Green |
| | P6 | Y | Yellow |
| | P7 | Z | Blue |
| | P8 | W | White |
| | P9 | O | Orange |
| Current | C1 | C | Black |
| | C2 | R | Red |
| | C3 | 3 | Brown |
| | C4 | 4 | Purple |
| | C5 | 5 | Green |
| | C6 | 6 | Yellow |
| | C7 | 7 | Blue |
| | C8 | 8 | White |
| | C9 | 9 | Orange |

TEST PLUGS:

INDIVIDUAL CURRENT CIRCUIT TEST PLUG.
STYLE No: 7B4618G04

SEPARATE SOURCE TEST PLUG (10 POS).
STYLE No: 1164046

IN-SERVICE SERIES TEST PLUG.
STYLE No: 129A062G01

ECO EM2007-1099 1

The information contained in this document has to be kept strictly confidential. Any unauthorized use, reproduction, distribution or disclosure to third parties is strictly forbidden.
ABB reserves all rights regarding Intellectual Property Rights.

SOFTWARE TYPE:
AUTOCAD 2006

ENG. REF: MFG DWG: 101R687
GEN DWG: 1616C24

DFTR/DATE: M.Uriguen 4/3/2008

CHKR/DATE: M.Uriguen 4/3/2008

APPR/DATE: Tim Masters 4/3/2008

TITLE:
**FT-1 SWITCH
POLE ARRANGEMENT & INT SCH**

© Copyright 2008 ABB
All rights reserved

SIZE: A
DWG. NO: 991A264
REV: 1

ABB Protective Relays and Switches, Coral Springs FL, U.S.A.

SCALE: NONE SHEET 1 OF 1

